

WINSTON

2025 EXHAUST FAN INDUSTRIAL

Focus on ventilation and cooling equipment



SHANDONG WINSTON AGRICULTURE TECHNOLOGY CO,LTD.

Add: Economic Development Zone,Qingzhou City,Shandong Province,China

Tel:+8613668661118+8615763023021

Nhập khẩu và phân phối:


CÔNG TY TNHH SX THƯƠNG MẠI KỸ THUẬT TIẾN PHÁT

Địa chỉ: 324 Đặng Thúc Vịnh, Ấp 1, Xã Đông Thạnh, Huyện Hóc Môn, TP.HCM

Web: www.diencotienphat.com



Email: info@diencotienphat.com

Hotline: 0907.315.989

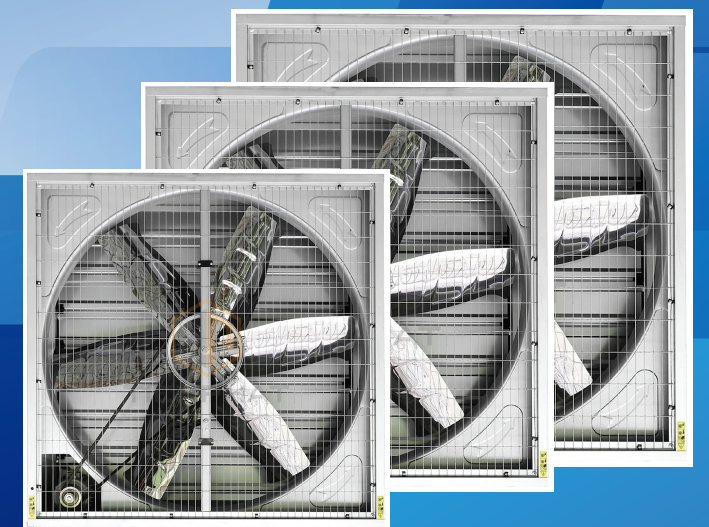

- Drop hammer exhaust fan •
- Composite exhaust fan •
- Cooling pad •

Product Specifications




MODEL	DIAMETER OF BLADES (mm)	AIR VOLUME (m3/h)	POWER (w)	VOLTAGE (v)	OUTER SIZE L*W*H (mm)	WEIGHT (kg)
WS-400	300	10.000	180	220V/380V	400*400*320	8
WS-500	400	11.000	250	220V/380V	500*50*320	11
WS-600	500	16.000	370	220V/380V	600*60*320	14
WS-700	600	17.000	370	220V/380V	700*700*320	18
WS-800	710	18.000	370	220V/380V	800*800*400	27
WS-900	750	28.000	550	220V/380V	900*900*400	34
WS-1000	900	30.000	550	220V/380V	1000*1000*400	39
WS-1100	1000	34.500	750	220V/380V	1100*1100*400	42
WS-1220	1100	38.000	1100	220V/380V	1220*1220*400	52
WS-1380	1250	42.000	1100	220V/380V	1380*1380*400	55
WS-1530	1400	52.000	1500	220V/380V	1530*1530*400	68



Product Specifications

Model	TPU-4000M	TPU-5200M	TPU-6200M	TPU-7300M	TPU-8000M
Airflow(m³/min)	6800	8600	9800	10800	13500
Diameter	4.0M/13FT	5.2M/17FT	6.2M/20FT	7.2M/24FT	8.0M/26FT
Power	1.1KW	1.1KW	1.5KW	1.5KW	1.5KW
Voltage	380V/220V	380V/220V	380V/220V	380V/220V	380V/220V
Frequency	50/60HZ	50/60HZ	50/60HZ	50/60HZ	50/60HZ
Max speed	93r/min	81r/min	72r/min	50/55r/min	50r/min
Noise(DB)	≤40	≤40	≤40	≤40	≤40
Weight(kg)	130	140	155	165	170
Cover area(m²)	800	850	1100	1500	1600

TPM Fiberglass steel roof fan

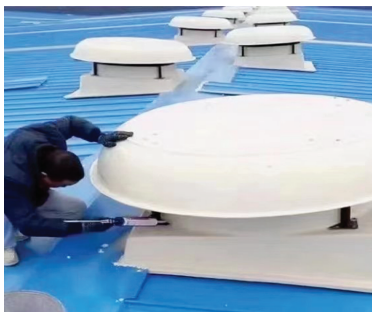

Product features:

The fan is made of fiberglass, scientific aerodynamic design and reasonable and beautiful structure, It is suitable for forced ventilation in workshop, grain depot, electric power, petroleum, chemical industry, metallurgy, stadium and other modern facilities

- Fan installed vertically on the roof, the mushroom wind and rain hat guarantee no wind and rain enter, the guide plate can reduce the loss of wind
- Thick and corrosion resistance shell by hand molding, Smooth surface without burrs
- SMC paddle blades, 6 blade; also can exchange to be 7 nylon blade and cast aluminum blade
- Special custom-made aluminum shell direct drive motor, save maintain cost
- Hot galvanized steel protecting net or PVC shutter will be optional

MODEL	DIAMETER OF BLADES (mm)	RATED SPEED (r/min)	AIR VOLUME (m3/h)	POWER (KW / HP)	VOLTAGE (V)	OUTER SIZE (L*W*H) (mm)	WEIGHT (Kg)
TPM - 1060	890	560	30000	0,75 / 1	220 / 380	1450*1090*700	48
TPM - 1460	1220	560	40000	1,5 / 2	220 / 380	1820*1490*900	70

TP Fiberglass Ventilation Fan

Product Specifications



MODEL	DIAMETER OF BLADES (mm)	RATED SPEED (R/min)	AIR VOLUME (m3/h)	POWER (Kw/HP)	VOLTAGE (v)	OUTER SIZE L*W*H (mm)	WEIGHT (kg)
WS-1460	1260	520	44.000	1,1/1,5	220V/380V	1460*1460*600	56
WS-1260	1080	520	40.000	1,1/1,5	220V/380V	1260*1260*560	43
WS-1060	890	520	28.000	0,55/,075	220V/380V	10601060*560	36
WS-850	640	700	13.000	0,37/0,5	220V/380V	850*850*450	23
WS-660	480	950	10.000	0,37/0,5	220V/380V	660*660*450	18
WS-560	380	950	8.000	0,37/0,5	220V/380V	560*560*450	15